## **BM 325**

Also available:
BAR LINE BS 305,
BM 305, BM 405,
BM 525, BM 605,
BM 805, BM 1005.
See pertaining literature
for more details

## BAR LINE

ICE - MACHINES







"Casino" Modular Equipment range is the perfect choice of ice makers offered by Bar line for the needs of global -standard "full" and "half dice" ice cubes shape.

Built in the USA, in the Mile High manufacturing plant, these units are built with sturdy, corrosion resistant, 300 Series stainless steel, and feature electromechanic controls that assure long years of trouble-free operation.

The Casino modular range features a variety of daily production capacity models in 56 cm (22"), 76 cm (30") width, that may be installed on ice storage bins offered in variable capacities.

Top air discharge is available as an option to assure appropriate airflow incritical install environments.


- ✓ Space-saving 558 mm tall design.
- Produces up to 140 kg of ice per day. (Rated at 70 ° (21°) Air/50° (10°) Water)
- Available with an air or water-cooled condenser.
- "Harvest Assist" mechanism reduces the harvest cycle time by pushing the ICE off the evaporator and into the bin rather than waiting for gravity to come into play. It allows for consistent ice production for the life of the ice maker, increasing daily capacity while reducing energy consumption.
- Aglon® built-in antimicrobial protection inhibits bacteria growth on ice maker surfaces that come in contat with water.
  - Optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Global Standards Warranty protection against manufacturing defects.
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic. When available, remote condensers are coated with a corrosion protection to reduce the impact of salt in the air in coastal regions outdoor installations.

## BAR LINE

## **BM 325**





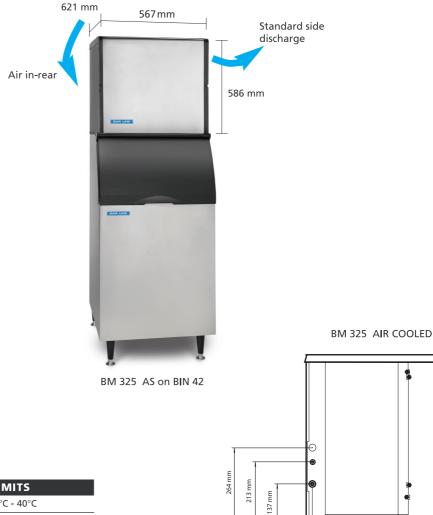

CORD SET

ICE MAKER POTABLE WATER IN 3/8" FTP
ICE MAKER WATEROUT 3/4" FTP

OPERATING LIMITS								
Air Temp. Range	10°C - 40°C							
Water Temp. Range	5°C - 35°C							
Water Pressure	Min. 1 bar Max. 5 bar							
Electrical Voltage	230V/50Hz/pH (on selected models)							

All specifications and performance data are subject to normal manufacturing variances.

All units have stainless steel finish. Refrigerant: R 404A

ORDERING AND SPECIFICATION INFORMATION										
Model No.	Cond. Unit	ICE Production per 24 hrs. at 10°C Air/10°C Water Kgs.	Available matching storage bins	Voltage Characteristics	Refrigerant	Water Consumption Lt/60'	Electric Consumption kwh/24h	Net Weight Kgs.	Max. Shipping Weight Kgs.	
BM 325 AS	Air	140	BIN25+KBT19-BIN40+KBT19 BIN42 - BIN55+KBT19	230/50/1	R404A	14,98	22	-	71	



We reserve the right to make changes in design and construction at any time without obligation. ADV-Bar-Line 11/2010



ICE - MACHINES

Frimont S.p.A.
Via Lainate 31/b - 20010 Pogliano Milanese - (Milano) Italy
Tel. +39.02.93960.239 - Fax +39.02.93960.201
barline@frimont.it - www.barline.it

406 mm Between Bin Straps